

Model TS418-1N426 Thermopile Sensor



- Thermopile IR-Sensor
- Filter for NDIR CO₂ Gas Detection
- Single Element
- Very High Signal
- Flat Filter
- Small Package
- Accurate Reference Sensor

DESCRIPTION

Thermopiles are mainly used for contactless temperature or non-dispersive infrared measurement in many applications. Their function is to transfer the heat radiation emitted from the objects or other infrared sources into a voltage output.

FEATURES

- Very High Signal
- Accurate Reference Sensor
- 4.26 μ m Narrow Band Pass
- Small TO-18 package

APPLICATIONS

- NDIR CO₂ Gas Detection

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Min | Typical | Max | Unit | Description |
|---------------------|----------------|-----|---------|------|------|---------------|
| Storage Temperature | T _S | -20 | +20 | +85 | °C | permanent |
| Storage Temperature | T _S | -20 | +20 | +100 | °C | non permanent |

Model TS418-1N426 Thermopile Sensor

PERFORMANCE SPECS

| Parameter | Symbol | Value | Unit | Condition |
|--|---------------|-------------------------|----------------------|--|
| Operating Ambient Temperature | T_{Amb} | -20 to +85 | °C | permanent |
| Operating Ambient Temperature | T_{Amb} | -20 to +100 | °C | non permanent |
| Package | | TO-18 | | |
| Absorber Area | A | 1.4×1.4 | mm ² | |
| Thermopile Resistance | R_{TP} | 180 ± 60 | k Ω | $T_{Amb} = +25\text{ }^{\circ}\text{C}$ |
| Temperature Coefficient of Thermopile Resistance | TCR_{TP} | -0.06 ± 0.04 | %/K | $T_{Amb} = +25\text{ }^{\circ}\text{C}$ to $+75\text{ }^{\circ}\text{C}$ |
| Voltage Response | V_{TP} | depends on light source | mV | |
| Temperature Coefficient of Voltage Response | TCV_{TP} | -0.45 ± 0.08 | %/K | $T_{Amb} = +25\text{ }^{\circ}\text{C}$ to $+75\text{ }^{\circ}\text{C}$ |
| Noise Equivalent Voltage | NEV | 130 | nV/Hz ^{1/2} | $T_{Amb} = +25\text{ }^{\circ}\text{C}$ |
| Rise Time | τ_{63} | 22 ± 5 | ms | |
| Ambient Temperature Sensor | | Ni-RTD | | |
| Ambient Temperature Sensor Resistance | R_{Ni-RTD} | 1000 ± 4 | Ω | $T_{Amb} = 0\text{ }^{\circ}\text{C}$ |
| Temperature Coefficient of Ni-RTD | TC_{Ni-RTD} | 6178 ± 150 | ppm/K | $T_{Amb} = 0\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$ |

Model TS418-1N426 Thermopile Sensor

OPTICAL CHARACTERISTICS

| Parameter | Symbol | Value | Unit | Description |
|---------------|--------|-------|------|--------------------------|
| Field of View | FOV | 110 | deg | at 50% of maximum signal |

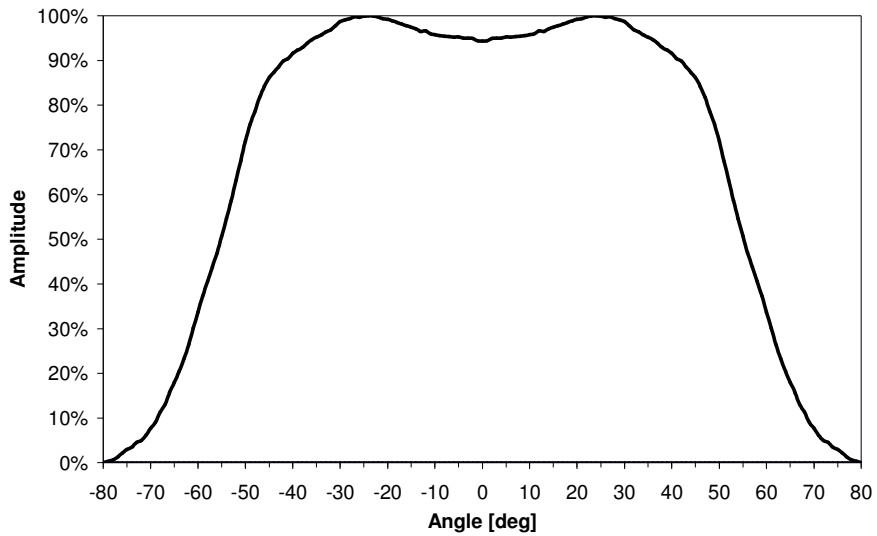


Figure 2: Field of View Curve

FILTER CHARACTERISTICS

| Parameter | Symbol | Value | Unit | Description |
|-------------|--------|------------|------|------------------|
| Filter Type | NBP | 4.26 ±0.18 | μm | Narrow Band Pass |

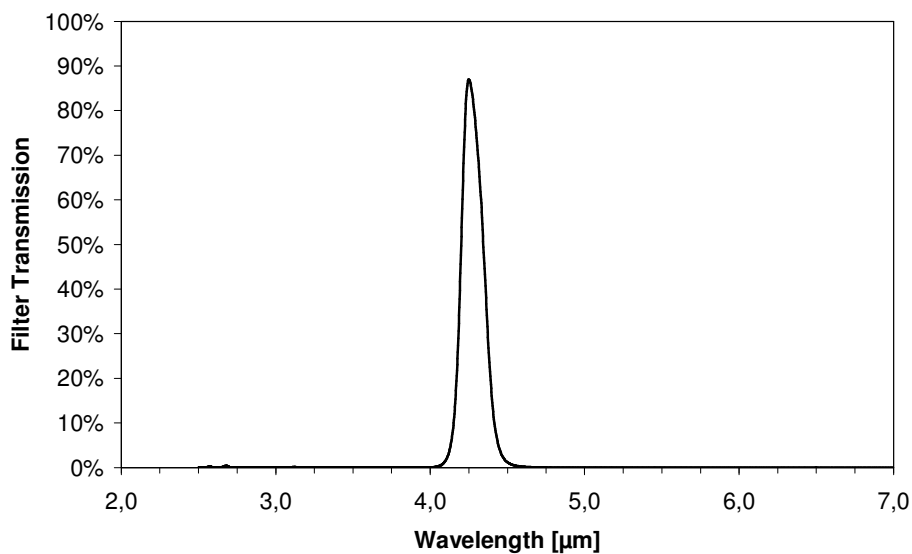


Figure 3: Filter transmission curve

Model TS418-1N426 Thermopile Sensor

ELECTRICAL CONNECTIONS

| Pin | Symbol |
|-----|--------|
| 1 | TP + |
| 2 | Ni-RTD |
| 3 | TP - |
| 4 | GND |

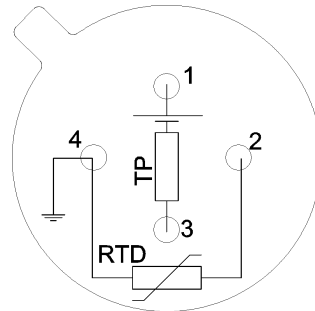


Figure 4: Electrical connections - bottom view of thermopile

MECHANICAL DIMENSIONS

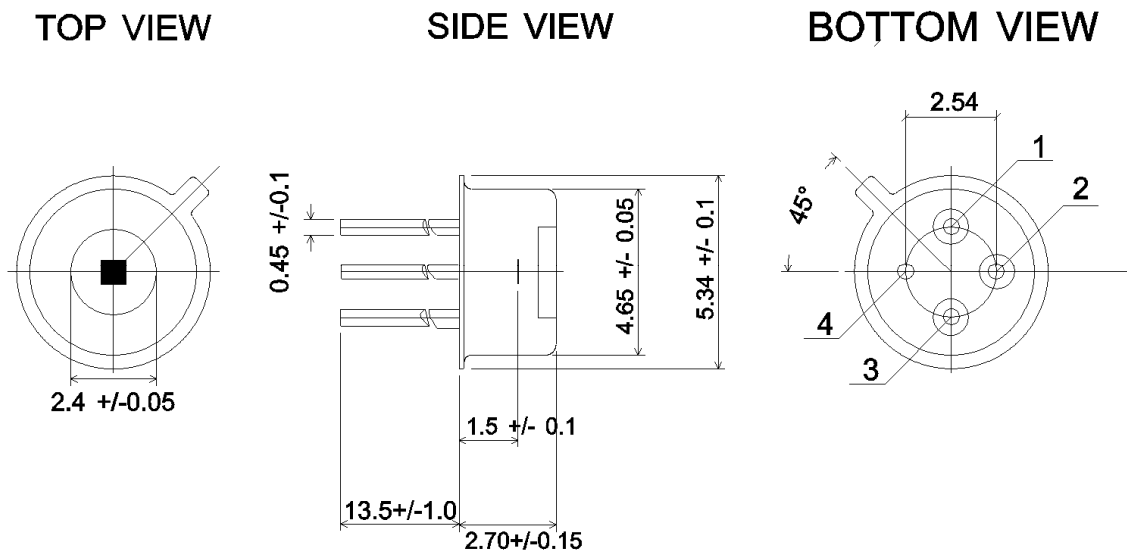


Figure 5: Mechanical dimensions of thermopile

Model TS418-1N426 Thermopile Sensor

ORDERING INFORMATION

Part Descripton TS418-1N426

Part No. G-TPCO-035